



**BLJT (单枪) 型冷端喷涂机**  
**BLJS (双枪) 型冷端喷涂机**

Cold End Coating.Type BLJT.Single Spray Unit  
Cold End Coating.Type BLJS.Double Spray Unit



■ 性能特点:

增加退火后玻璃瓶罐的润滑性和耐摩擦性，可以配用1.2米至4.5米宽的网带退火炉；PLC可编程控制及光电开关光侧系统。

■ 涂料:

可溶水的聚二醇及聚二脂类，不溶水的硬脂酸类，硅酮等悬浮物；油酸类。

■ 技术参数:

电源	220V/50Hz
喷枪最大移动速度	1m/s
气源压力	0.4MPa
装机容量	0.4Kw

■ Use and Features

To increase the lubricity and antifricition [scuffing] of glass bottles after annealing.

This equipment can be installed on annealing lehrs with belt widths from 1.2 meters to 4.5 meters

The traverse motion is controlled by a PLC programmable controller and infrared photo detect unit.



■ Coating Material

Polydiester and polyalkylene or the equivalent dissolved in water.

■ Technical Data

Power:	220V/50Hz.
Spray Nozzle Max. Speed:	1 m/s
Air Pressure:	0.4 MPa
Power Required:	0.4 Kw

2700	3250	BLJT2700, BLJS2700	4500	4890	BLJT4500, BLJS4500
2400	2950	BLJT2400, BLJS2400	4200	4750	BLJT4200, BLJS4200
2100	2650	BLJT2100, BLJS2100	3900	4450	BLJT3900, BLJS3900
1800	2350	BLJT1800, BLJS1800	3600	4150	BLJT3600, BLJS3600
1500	2050	BLJT1500, BLJS1500	3300	3850	BLJT3300, BLJS3300
1200	1750	BLJT1200, BLJS1200	3000	3550	BLJT3000, BLJS3000
网间宽度Belt Width	地脚尺寸B Foot size B	喷涂机型号Model	网间宽度Belt Width	地脚尺寸B Foot size B	喷涂机型号Model

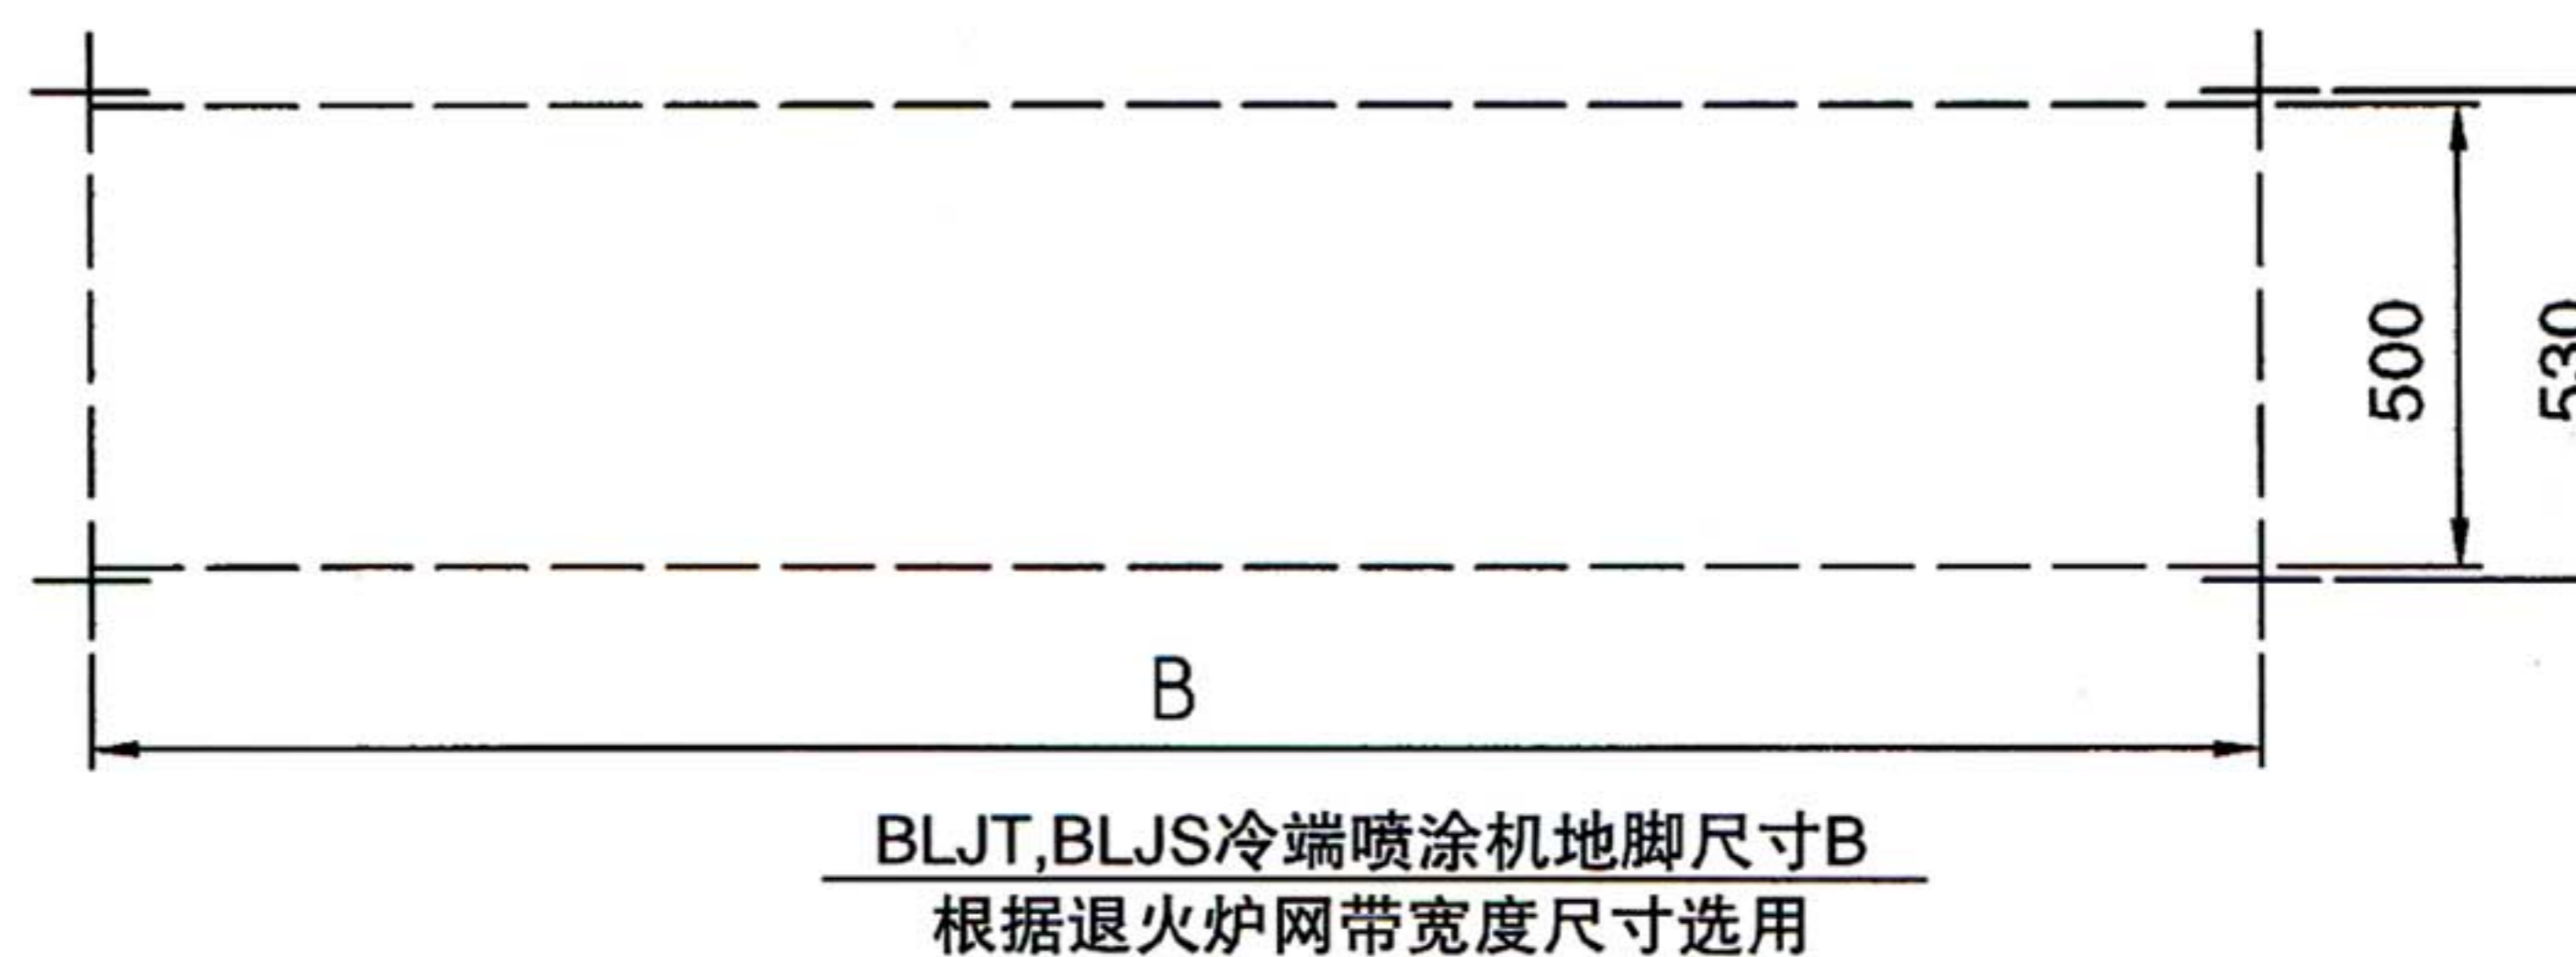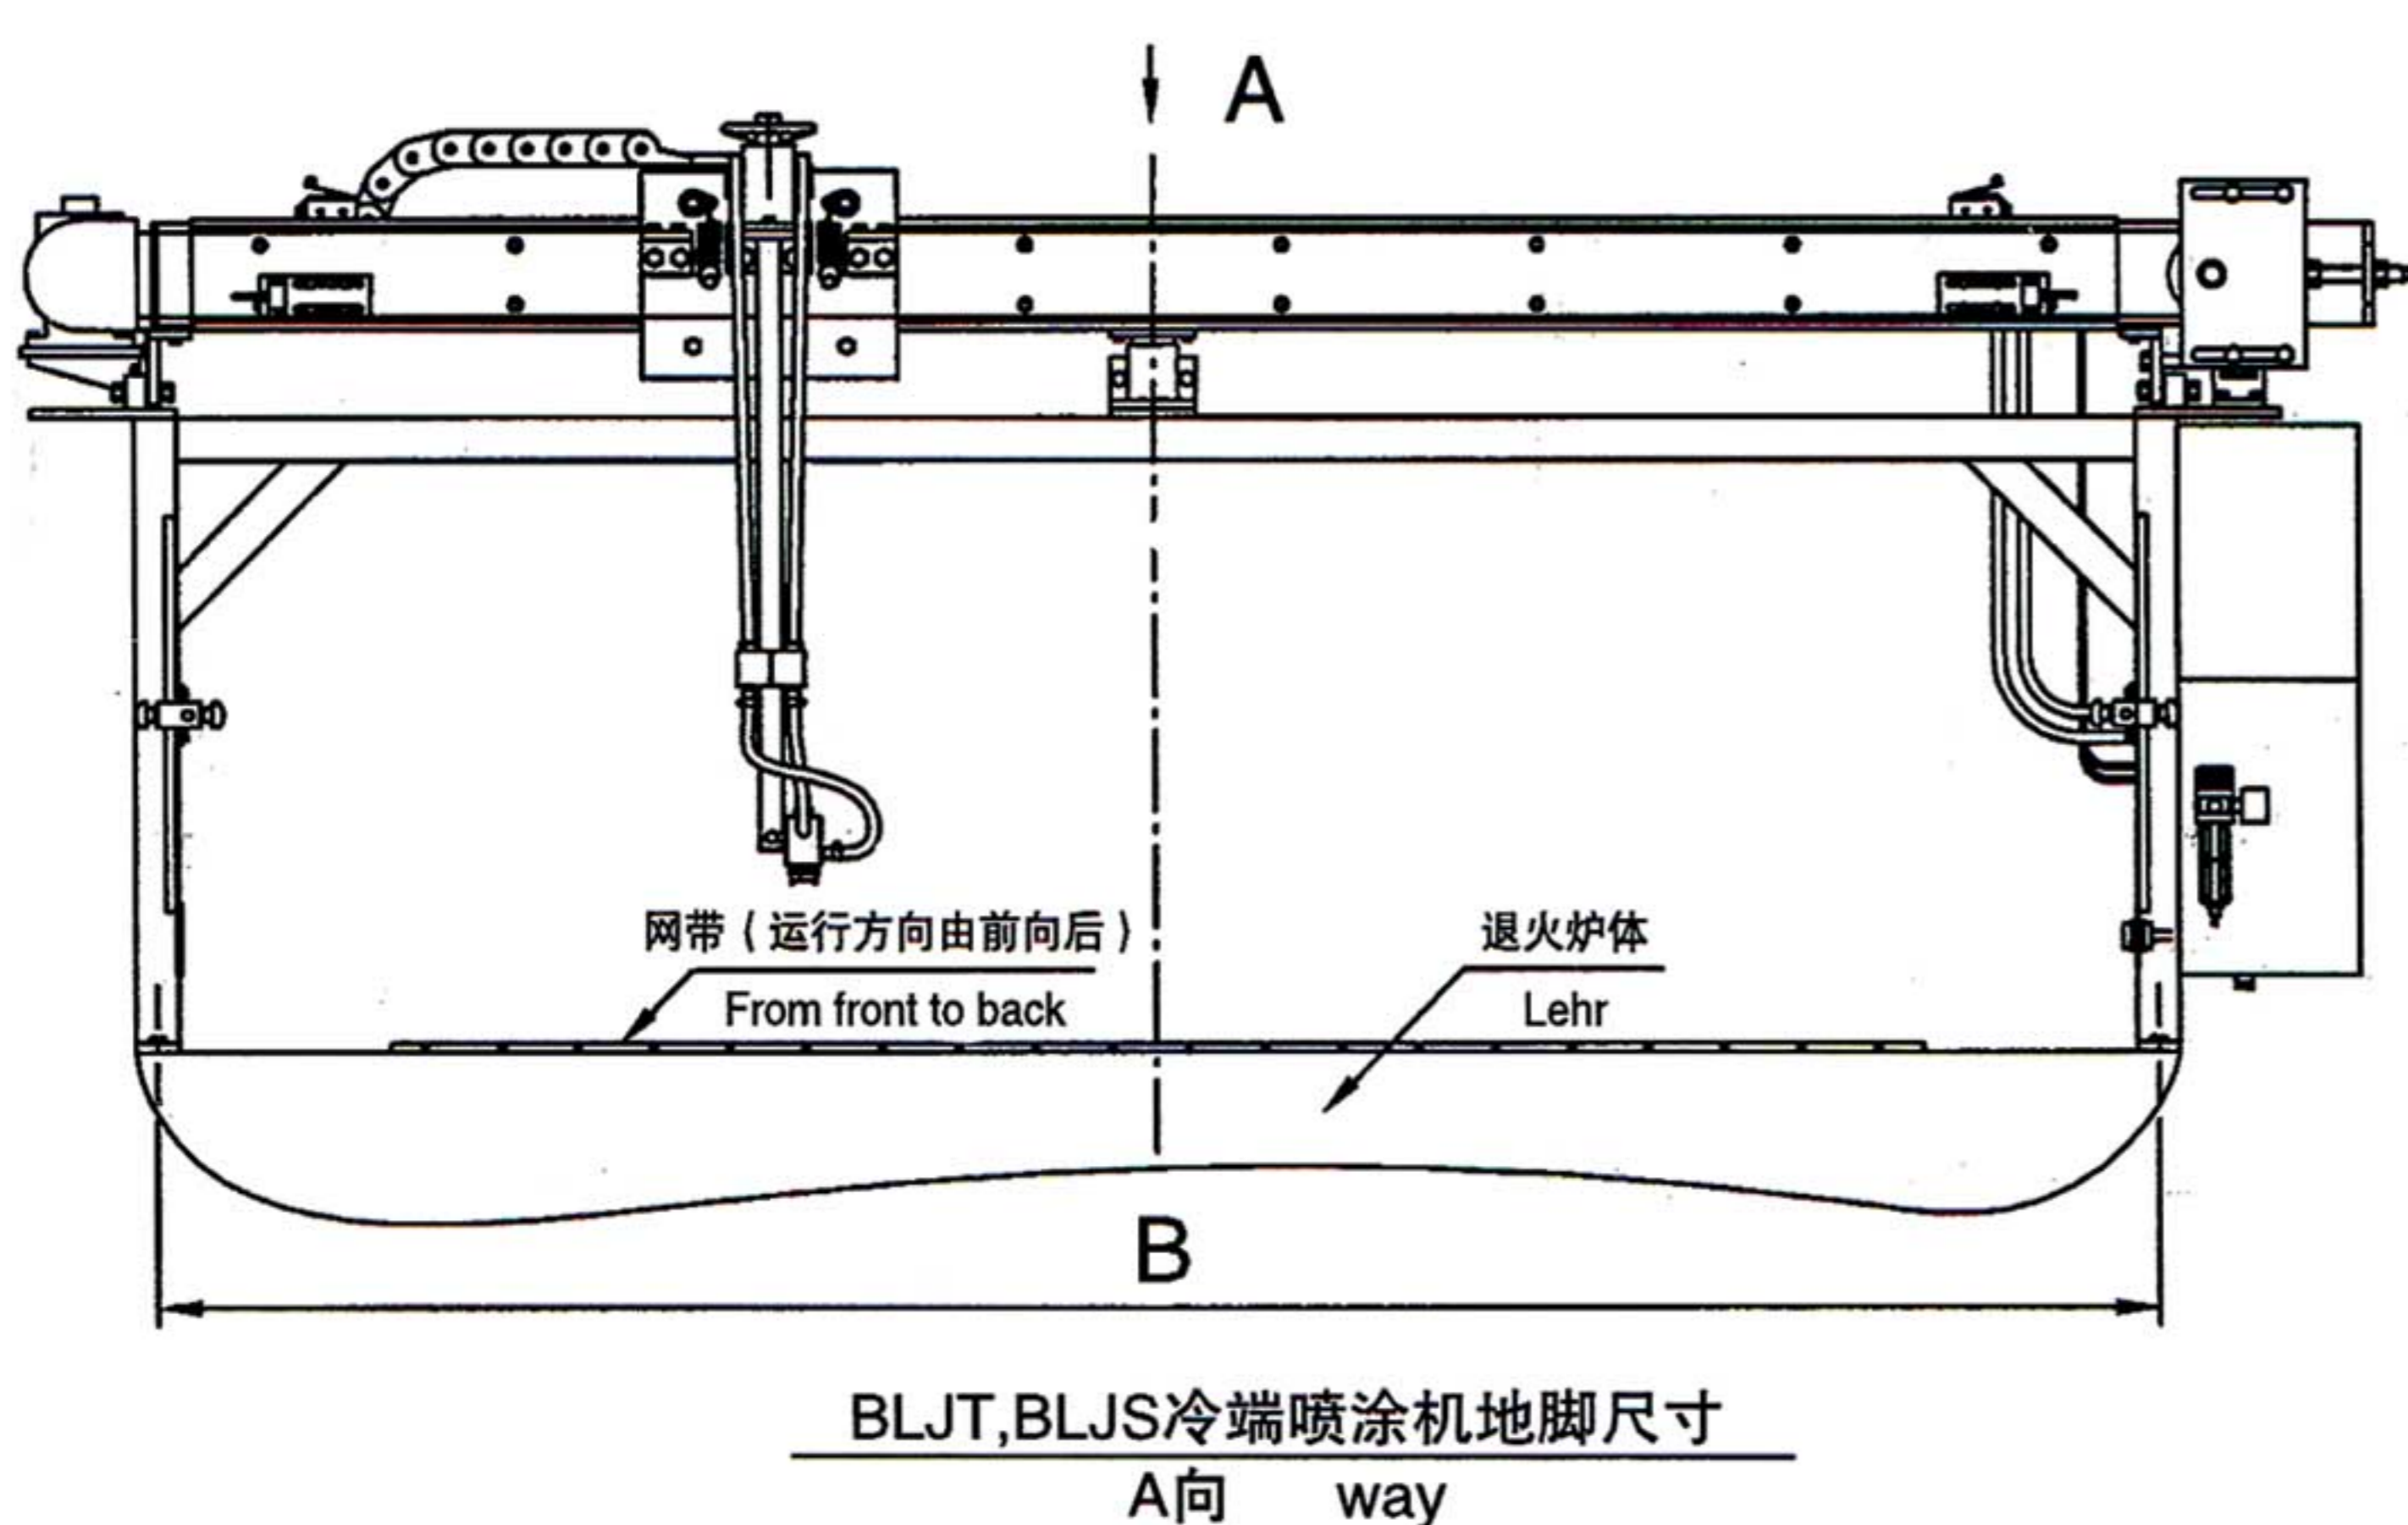

山东三金玻璃机械有限公司

地址: 中国山东省淄博市周村区兴鲁大道577号  
电话: 0533 6182508/6180774  
传真: 0533 6187508/6166065  
网址: www.sanjinglass.com  
邮编: 255300

Shandong Sanjin Glass Machinery Co., Ltd.

Address: 577 Xinglu Road, Zhoucun Zibo 255300, Shandong, China  
Tel: +86 533 6182508/6180774  
Fax: +86 533 6187508/6166065  
Website: www.sanjinglass.com